


ALWAYS

WHEN APPROACHING VEHICLE LOOK FOR:

- loose wires/hoses
- broken lights/mirrors/glass
- truck leaning
- oil puddles/leaks
- loose components
- body damage

PRE-TRIP / POST-TRIP VEHICLE INSPECTION GUIDE

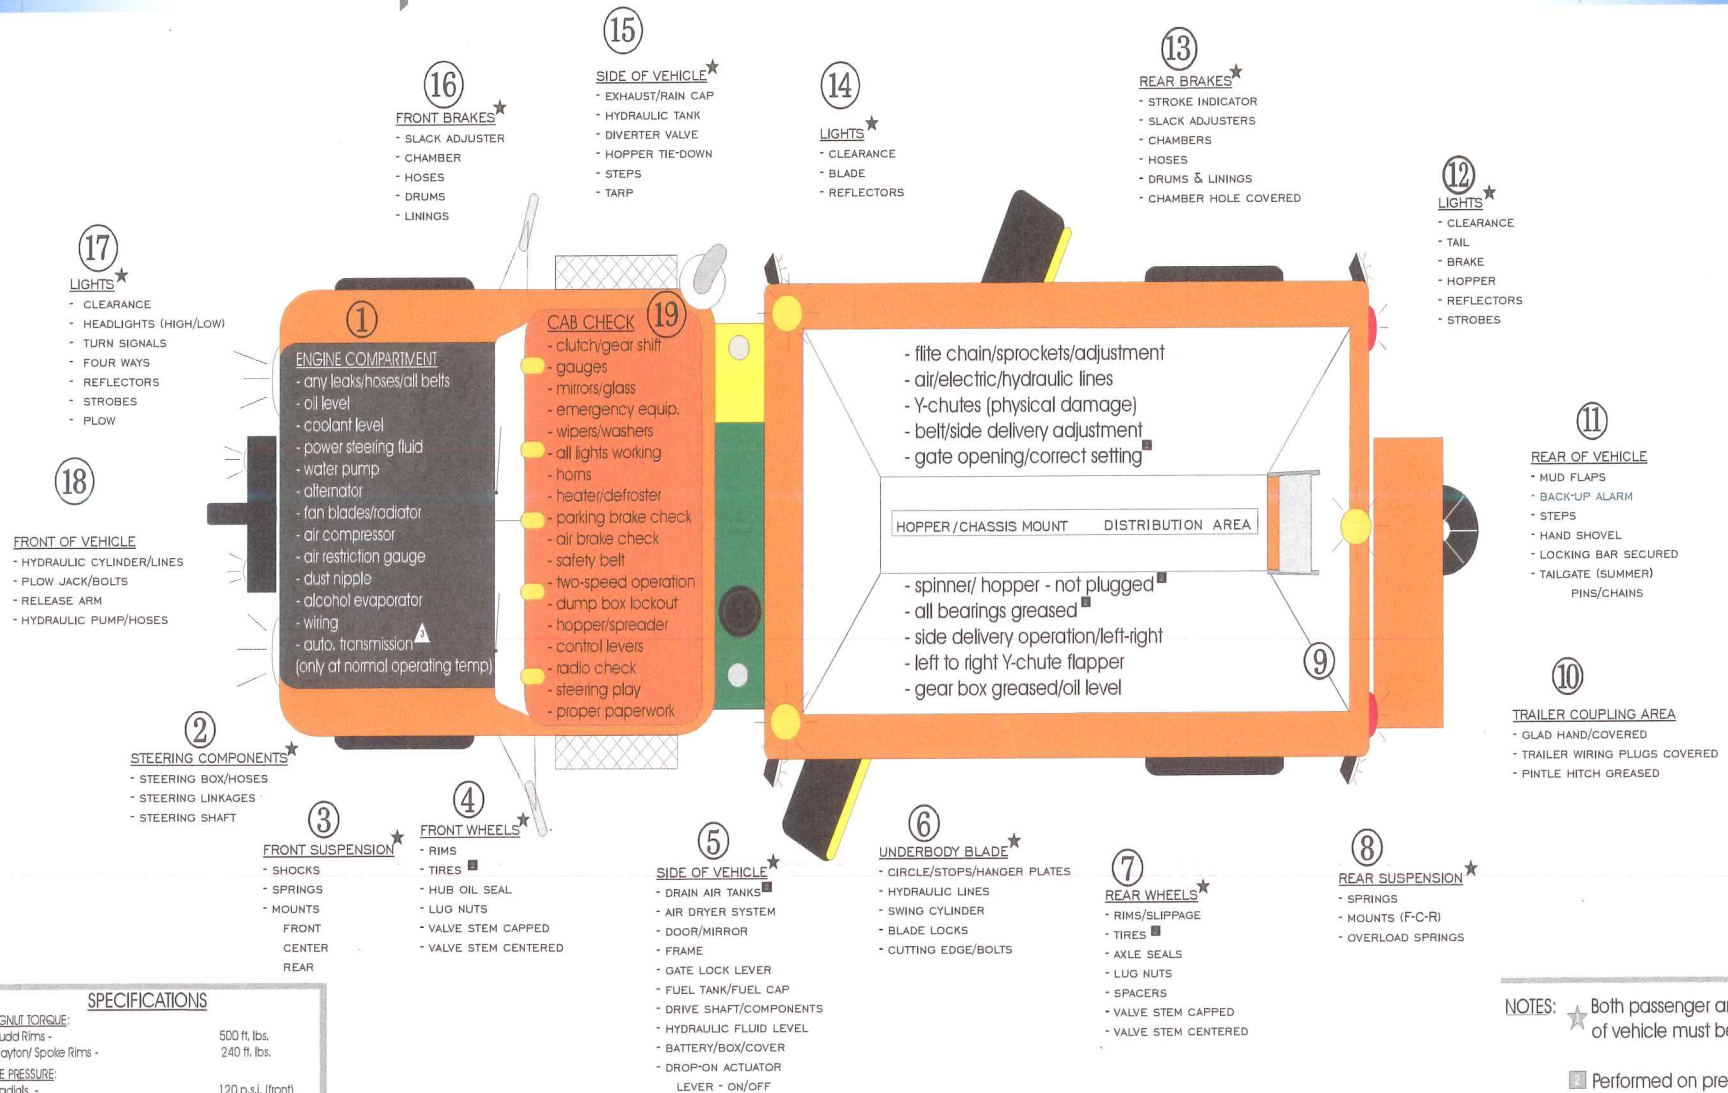

17
LIGHTS★

- CLEARANCE
- HEADLIGHTS (HIGH/LOW)
- TURN SIGNALS
- FOUR WAYS
- REFLECTORS
- STROBES
- PLOW

18

- FRONT OF VEHICLE**
- HYDRAULIC CYLINDER/LINES
 - PLOW JACK/BOLTS
 - RELEASE ARM
 - HYDRAULIC PUMP/HOSES

2

- STEERING COMPONENTS**★
- STEERING BOX/HOSES
 - STEERING LINKAGES
 - STEERING SHAFT

3

- FRONT SUSPENSION**★
- SHOCKS
 - SPRINGS
 - MOUNTS
 - FRONT
 - CENTER
 - REAR

4

- FRONT WHEELS**★
- RIMS
 - TIRES ■
 - HUB OIL SEAL
 - LUG NUTS
 - VALVE STEM CAPPED
 - VALVE STEM CENTERED

15

- SIDE OF VEHICLE**★
- EXHAUST/RAIN CAP
 - HYDRAULIC TANK
 - DIVERTER VALVE
 - HOPPER TIE-DOWN
 - STEPS
 - TARP

14

- LIGHTS**★
- CLEARANCE
 - BLADE
 - REFLECTORS

13

- REAR BRAKES**★
- STROKE INDICATOR
 - SLACK ADJUSTERS
 - CHAMBERS
 - HOSES
 - DRUMS & LININGS
 - CHAMBER HOLE COVERED

12

- LIGHTS**★
- CLEARANCE
 - TAIL
 - BRAKE
 - HOPPER
 - REFLECTORS
 - STROBES

11

- REAR OF VEHICLE**
- MUD FLAPS
 - BACK-UP ALARM
 - STEPS
 - HAND SHOVEL
 - LOCKING BAR SECURED
 - TAILGATE (SUMMER) PINS/CHAINS

10

- TRAILER COUPLING AREA**
- GLAD HAND/COVERED
 - TRAILER WIRING PLUGS COVERED
 - PINTLE HITCH GREASED

19

- CAB CHECK**
- clutch/gear shift
 - gauges
 - mirrors/glass
 - emergency equip.
 - wipers/washers
 - all lights working
 - horns
 - heater/defroster
 - parking brake check
 - air brake check
 - safety belt
 - two-speed operation
 - dump box lockout
 - hopper/spreader
 - control levels
 - radio check
 - steering play
 - proper paperwork

6

- UNDERBODY BLADE**★
- CIRCLE/STOPS/HANGER PLATES
 - HYDRAULIC LINES
 - SWING CYLINDER
 - BLADE LOCKS
 - CUTTING EDGE/BOLTS

7

- REAR WHEELS**★
- RIMS/SLIPPAGE
 - TIRES ■
 - AXLE SEALS
 - LUG NUTS
 - SPACERS
 - VALVE STEM CAPPED
 - VALVE STEM CENTERED

8

- REAR SUSPENSION**★
- SPRINGS
 - MOUNTS (F-C-R)
 - OVERLOAD SPRINGS

SPECIFICATIONS

LUG NUT TORQUE:	
Budd Rims -	500 ft. lbs.
Dayton/ Spoke Rims -	240 ft. lbs.
TIRE PRESSURE:	
Radials -	120 p.s.i. (front) 110 p.s.i. (rear)
FLUIDS AND OILS:	
When adding lubricants, make certain to use only those specified on the Oil Recommendation Chart.	

NOTES: ★ Both passenger and driver side of vehicle must be inspected.

■ Performed on pre-trip only.

△ Performed on post-trip only.